

FULBAT[®]

STARTER BATTERY

POWERSPORT BATTERY RANGE

CATALOG 2024

LITHIUM | GEL | MF | DRY | CHARGERS



Feel the Power!

ABOUT US




French based company, Fulbat is a leading force in the battery business, present in both replacement and OEM markets. Founded in 2005, we are constantly developing, manufacturing, marketing and selling lead-acid batteries, as well as lithium batteries and battery chargers.

With our technical knowledges and experience, we are able to design new innovative battery solutions to meet the current customers' expectations. We offer an exhaustive program of Starter batteries, Industrial batteries and Motive Power batteries, covering a full range of application. Our Starter Battery range is designed to cover all powersport applications and Lawn & Garden applications.

Fulbat batteries and chargers are widely distributed on all continents through a strong distributor's network, and are very well recognized as qualitative, performing and reliable products.

Manufactured according to the most innovative production processes, Fulbat products are certified by ISO 9001, ISO 14001 and TS 16949.

WORLDWIDE PRESENCE

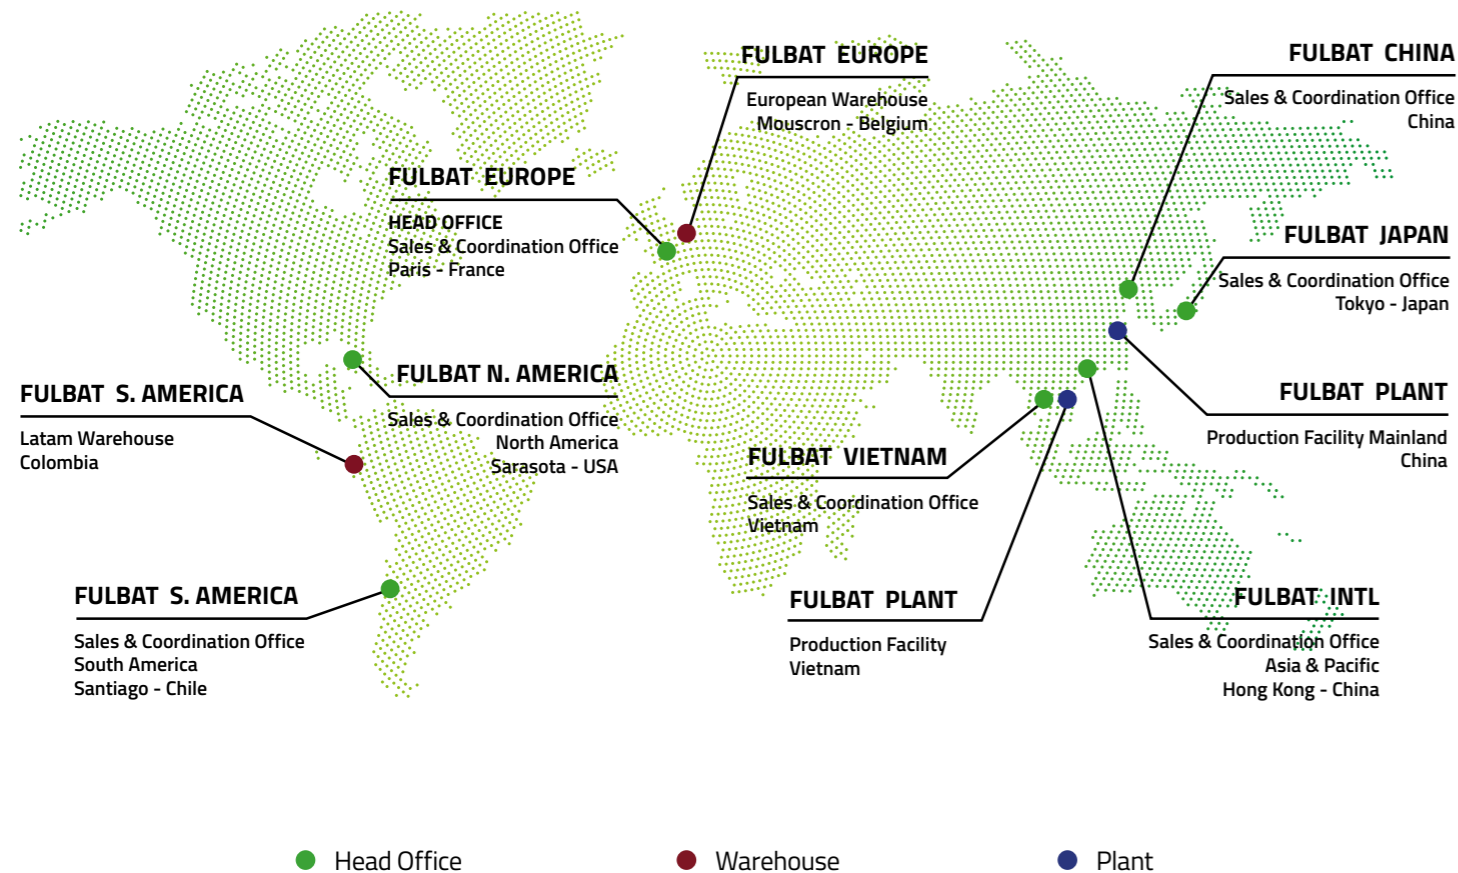

INTRODUCTION



No matter what type of vehicle you have or how you use it, our wide range of starter batteries has been developed to satisfy all current market requirements.

Composed of a comprehensive line of batteries, Fulbat Starter Battery offers different technologies:

LITHIUM (LiFePO4), GEL, MF & DRY.


Fulbat batteries will provide multiple and varied benefits: high starting performance, light weight, ready to use, maintenance free, vibration resistance and many others, whether for leisure or competition.

From 1st February 2021, a new EU regulation for the sale of acid for batteries came into force. On that date, the sale of electrolyte for batteries (sulfuric acid), has been prohibited to end users (non-professionals), and only professionals are now entitled to acquire batteries with an electrolyte pack.

As a battery specialist, Fulbat maintains all its product ranges and offers the widest ready to use battery range.

APPLICATIONS

Fulbat Starter Battery covers the wide majority of powersport applications.

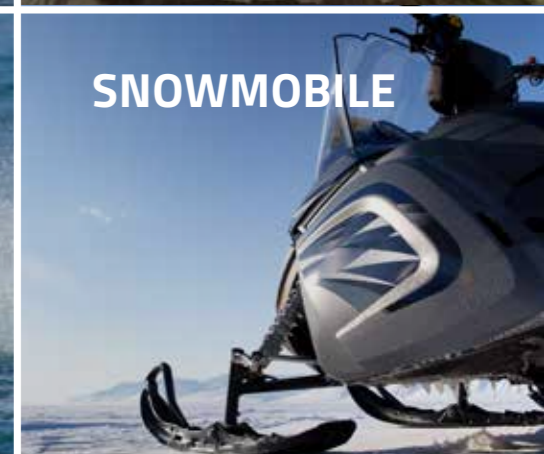

MAIN FEATURES

From Dry to Lithium technology and from daily use to leisure, Fulbat batteries provide different performances and features.

LITHIUM (LiFePO4) RANGE

High performance & light weight

The Lithium range is designed to offer the ultimate riding experience. Ready to use and with ultra-light weight conception, this LiFePO4 range will ensure extreme starting performance, very low self-discharge and extreme cycle life. Thanks to the Battery Management System integrated, these batteries offer a very safe solution, ideal for the most demanding riders.



	LITHIUM	GEL	MF	DRY
Performances	Cold Cranking Amp	★★★★	★★★★	★★★
	Cycle Life	★★★★	★★★★	★★★
	Vibration resistance	★★★★	★★★★	★★★
	Weight	★★★★	★	★
	Shelf Life in storage	★★★★	★★	★★★★
Features	Fitting			
	Ready to use	YES	YES	-
	Maintenance Free	YES	YES	YES
	No acid handling	YES	YES	-
	Easy to ship	YES*	YES	-
	Compatible e-commerce <small>Compliant with 2021 European (EU) 2019/1148 Regulation for the sale of acid for batteries</small>	YES	YES	-
	Multipositional fitment			

*According to ADR, IMDG & IATA regulations

FEATURES

- Ready to use
- 100% maintenance Free
- Ultra-lightweight compare to lead acid battery
- Very high cold cranking performance
- Easy to install with the foam spacers
- Ultra-safe thanks to the integrated BMS
- Very fast recharge
- Multi-positional fitment
- Integrated LCD battery tester
- Very low self-discharge



COMPATIBLE CHARGERS

- Fulload 1000
- Fulbank 2000
- Fulload F4



Designation	P/N	Power (Wh)	Capacity Ah (10Hr)	CCA (A)	Dimensions (±2mm)			Polarity	Charging current (A)		Equivalent lead-acid battery types (most popular models)
					L	W	H		Std	Max	
FLTK01*	560501	25.6	2	140	86	48	90		1	2	KTM OE replacement
FLTX4L/5L/7L FLTZ5S/6S/7S	560622	38.4	3	180	113	70	85		1.5	3	FB4L-B; FTX4L-B/FTZ5S; FTX5L-B/FTZ6S; FTX5L-B/FTZ6S; FTX7L-B/FTZ7S; FTZ7V; FTZ8V
FLT7B/9B	560624	51,2	4	240	150	65	93		2	4	FT7B-4; FT7B-B/5; FT9B-4; FT9B-B/5
FLTX7A/9/12/14 FLTZ10S/12S/14S	560625	64	5	300	150	87	93		2.5	5	FTX7A-B/5; FTX9-B/5; FT12A-B/5; FTX12-B/5; FTX14-B/5; FTZ10S; FTZ12S; FTZ14S
FLT12B/14B	560626	76.8	6	360	150	69	130		3	6	FT12B-4; FT12B-B/5; FT14B-4; FT14B-B/5
FLTX20H	560628	153.6	12	720	175	87	155		6	12	FTX20-B/5
FLTX20HL	560627	153.6	12	720	175	87	155		6	12	FB16CL-B; FTX20L-B/5; FTX20HL-B/5; FHD20HL-B/5
FLTX30HL	560629	230,4	18	900	168	127	177		6	18	53030; FB30L-B; FB30CL-B; F60-N30L-A; FIX30L-B/5; FHD30L-B/5

*FLTK01 battery model has no integrated BMS

BATTERY FINDER

Find the right battery for your vehicle on fulbat.com



GEL RANGE

Ready to use & maintenance free


The Gel battery range is designed to offer maximum performance and safety! Ready to use, the GEL battery will not require any acid handling, initial preparation or maintenance. Non-spillable design (VRLA) linked to its high performance make it the ideal battery for all powersports.

FEATURES

- Ready to use
- 100% maintenance free
- Easy to install
- Factory activated (VRLA design)
- Non-spillable: easy to ship
- Multi-positional fitment
- Suitable for cold weather
- No acid handling
- Increased life time



NON-SPILLABLE



COMPATIBLE CHARGERS

- Fulload 1000
- Fulbank 2000
- Fulload F4

Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
6N4-2A/A-4	550959	6	4	4.2	25	71	71	93	+	-
6N6-3B/B-1	550960	6	6	6.3	50	95	55	117	+	+
B49-6	550961	6	10	10.5	80	91	83	159	+	+
B38-6A	550962	6	13	13.7	105	119	83	161	+	+
6N11A-1B/3A	550957	6	11	11.6	90	121	58	130	+	+
6N11A-4A	550958	6	11	11.6	90	121	58	130	+	+
12N5.5-3B	550980	12	5.5	5.8	70	135	60	130	+	+
12N5.5-4A	550981	12	5.5	5.8	70	135	60	130	+	+
FB3L-A/B	550842	12	3	3.2	35	98	56	110	+	+
FB4L-B	550916	12	5	5.3	50	120	70	92	+	+
FB5L-B	550991	12	5	5.3	65	120	60	130	+	+
FB7-A	550992	12	8	8.4	120	135	75	133	+	+
FB7C-A	550989	12	8	8.4	85	129	89	114	+	+
FB7L-B/B2	550995	12	8	8.4	100	136	76	130	+	+
FB9-B (12N9-4B-1)	550925	12	9	9.5	115	135	75	139	+	+
FB10L-A2/B2	550956	12	11	11.6	120	133	90	145	+	+
FB12A-A/B (12N12A-4A-1)	550947	12	12	12.6	155	134	80	161	+	+
FB12AL-A2	550926	12	12	12.6	150	134	80	161	+	+
FB14A-A2	550971	12	14	14.7	200	134	88	176	+	+
FB16AL-A2	550948	12	16	16.8	210	205	70	162	+	+

Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
FB16CL-B	550979	12	19	20	240	175	100	175	+	+
FT4B-BS	550949	12	2.3	2.4	40	113	38	85	+	+
FTR4A-BS	550950	12	2.3	2.4	45	113	48	85	+	+
FTX4L-BS/FTZ5S	550671	12	5	5.3	70	113	70	85	+	+
FTX5L-BS/FTZ6S	550919	12	5	5.3	90	113	70	105	+	+
FTX6.5L-BS	550963	12	6.5	6.8	85	147	73	112	+	+
FTX7L-BS	550920	12	6	6.3	100	113	70	130	+	+
FTX7A-BS	550915	12	6	6.3	90	150	87	93	+	+
FTX9-BS	550921	12	8	8.4	135	150	87	105	+	+
FT12A-BS	550679	12	10	10.5	175	150	88	105	+	+
FTX12-BS	550922	12	10	10.5	180	150	87	130	+	+
FTX14-BS	550923	12	12	12.6	200	150	87	145	+	+
FTX14L-BS	550990	12	12	12.6	200	150	87	145	+	+
FTX14AH-BS/FB14-A2/B2 (12N14-4A)	550946	12	14	14.7	210	135	90	167	+	+
FTX14AHL-BS/FB14L-A2/B2 (12N14-3A)	550927	12	14	14.7	210	135	90	167	+	+
FTX16	550763	12	14	14.7	230	150	87	161	+	+
FTX20-BS	550993	12	18	18.9	310	175	87	155	+	+
FTX20A-BS	550994	12	18	18.9	270	150	57	161	+	+
FTX20HL-BS	550924	12	18	18.9	310	175	87	155	+	+
FTX24HL-BS/F50-N18L-A/A2/A3 (12N18-3A)	550982	12	21	22.1	350	205	87	162	+	+
FIX30L-BS	550943	12	30	31.6	400	165	125	175	+	+
FTZ7S	550635	12	6	6.3	130	113	70	105	+	+
FT7B-4	550641	12	6.5	6.8	110	150	65	93	+	+
FTZ7V	550998	12	6.5	6.8	105	113	70	121	+	+
FTZ8V	550918	12	7	7.4	120	113	70	130	+	+
FT9B-4	550642	12	8	8.4	120	150	68	105	+	+
FTZ10S	550636	12	8.6	9.1	190	150	88	93	+	+
FTZ12S	550637	12	11	11.6	210	150	88	110	+	+
FT12-10Z	550999	12	10	10.5	180	194	59	112	+	+
FT12B-4	550643	12	10	10.5	210	150	69	130	+	+
FTZ14S	550638	12	11.2	11.8	230	150	88	110	+	+
FT14B-4	550644	12	12	12.6	210	150	69	145	+	+
53030 (F60-N30L-A)	550945	12	30	31.6	300	178	123	166	+	+
53034 (F60-N30-A)	550843	12	30	31.6	300	178	123	166	+	+



GEL FitHD RANGE

High capacity reinforced battery

The Gel FitHD range are high capacity batteries designed for Heady Duty applications. With specific terminals and reinforced battery case, these batteries offer a maximum vibration resistance and higher starting power.

FEATURES

- Ready to use
- 100% maintenance free
- Easy to install
- Specific HD terminals*
- Reinforced battery case
- Factory activated (VRLA)
- Non-spillable: easy to ship
- Multi-positional fitment
- Suitable for cold weather
- No acid handling
- Increased life time

*Only for FHD battery models



COMPATIBLE CHARGERS

- Fulload 1000
- Fulbank 2000
- Fulload F4



Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
NH12-20 (BMW)	550917	12	20	21.1	250	186	82	171	+	
FHD14HL-BS	550880	12	14	14.7	220	150	87	145	+	
FHD20HL-BS	550881	12	20	21.1	310	175	87	155	+	
FHD30HL-BS	550882	12	30	31.6	430	165	130	175	+	

AUXILIARY RANGE

High cycling capability

The Auxiliary battery range is specifically designed for Start-Stop automotive application. With non-spillable design and maintenance free, these AGM batteries provide enhanced cycling capability and the power required to run vehicle's on board electrics and computer management system.

FEATURES

- AGM technology
- Ready to use
- 100% maintenance free
- Easy to install
- Non-spillable
- Maximum safety
- Increased lifetime: cycle resistance x3
- Low self-discharge



COMPATIBLE CHARGERS

- Fulload 1000
- Fulbank 2000
- Fulload F4



Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
AUX9	550983	12	8	8.4	135	150	87	105	+	
AUX12	550984	12	10	10.5	180	150	87	130	+	
AUX14	550985	12	12	12.6	200	150	87	145	+	
AUX14J	550986	12	12	12.6	200	150	130	145	+	



Feel the Power!



Feel the Power!

MF RANGE

Maintenance free & easy to store

The MF battery range is designed to offer more comfort and performance. Maintenance free, the MF battery is delivered with a separate acid pack and needs to be filled and activated before the first use. Its AGM (Absorbed Glass Mat) design allows it to become sealed once activated and also improves the lifespan and resistance of the battery to harsh conditions.


FEATURES

- AGM technology
- Delivered with acid pack
- Need to be filled before first use
- No maintenance once activated
- Higher life cycle
- Upright installation only
- Reduction of plate sulfation
- Suitable for cold weather
- Unlimited shelf life



COMPATIBLE CHARGERS

- Fulload 1000
- Fulbank 2000
- Fulload F4

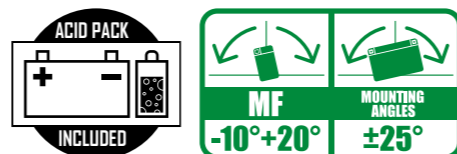

Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
FT4B-BS	550625	12	2.3	2.4	40	113	38	85	+	
FTR4A-BS	550624	12	2.3	2.4	45	113	48	85	+	
FTX4L-BS/FTZ5S-BS	550617	12	4	4.2	50	113	70	85	+	
FTX5L-BS	550618	12	4	4.2	80	113	70	105	+	
FTX7L-BS	550620	12	6	6.3	100	113	70	130	+	
FTX7A-BS	550619	12	6	6.3	105	150	87	93	+	
FT9A-BS	550748	12	9	9.5	115	135	75	139	+	
FTX9-BS	550621	12	8	8.4	135	150	87	105	+	
FT12A-BS	550602	12	10	10.5	175	150	88	105	+	
FTX12-BS	550603	12	10	10.5	180	150	87	130	+	
FTX14-BS	550604	12	12	12.6	200	150	87	145	+	
FTX14L-BS	550605	12	12	12.6	200	150	87	145	+	
FTX14AHL-BS	550607	12	12	12.6	210	135	90	167	+	
FTX14AH-BS	550606	12	12	12.6	210	135	90	167	+	
FTX16-BS	550609	12	14	14.7	230	150	87	161	+	
FTX20-BS	550611	12	18	18.9	270	175	87	155	+	
FTX20A-BS	550808	12	18	18.9	270	150	87	161	+	
FTX20L-BS	550610	12	18	18.9	270	175	87	155	+	
FTX24HL-BS	550630	12	21	22.1	350	205	87	162	+	
FIX30L-BS	550631	12	30	31.6	400	165	125	175	+	



DRY RANGE

Easy to store

The Dry battery range offers an incomparable choice of 6V and 12V models. Delivered with an acid pack, the DRY battery must be activated before the first use and must be checked periodically. DRY construction, no maintenance is necessary during a long period of storage.

FEATURES

- ✓ DRY charged construction
- ✓ Activation before first use
- ✓ Periodically maintenance & refilled if necessary
- ✓ Upright installation only
- ✓ 6V & 12V batteries
- ✓ Regular life duration
- ✓ Unlimited shelf life



COMPATIBLE CHARGERS

- ✓ Fulload 1000
- ✓ Fulbank 2000
- ✓ Fulload F4



Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
6N4-2A	550891	6	4	4.2	25	71	71	96	⊖ ⊕ +	-
6N4-2A-4	550510	6	4	4.2	25	71	71	96	⊖ ⊕ +	-
6N4B-2A	550514	6	4	4.2	35	102	48	96	⊖ ⊕ +	-
6N6-3B	550518	6	6	6.3	50	99	57	111	⊖ ⊕ +	⊖
6N6-3B-1	550519	6	6	6.3	50	99	57	111	⊖ ⊕ +	⊖
6N11A-1B	550501	6	11	11.6	90	122	62	131	⊖ ⊕ +	⊖
6N11A-3A	550894	6	11	11.6	90	122	62	131	⊖ ⊕ +	⊖
B39-6	550892	6	7	7.4	60	126	48	126	⊖ ⊕ +	⊖
B49-6	550893	6	8	8.4	80	91	83	160	⊖ ⊕ +	⊖
B38-6A	550896	6	13	13.7	105	119	83	161	⊖ ⊕ +	⊖
12N5.5-3B	550529	12	5.5	5.8	55	135	60	130	⊖ ⊕ +	⊖
12N5.5-4A	550530	12	5.5	5.8	55	135	60	130	⊖ ⊕ +	⊖
FB3L-A	550589	12	3	3.2	32	98	56	110	⊖ ⊕ +	⊖

Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
FB3L-B	550588	12	3	3.2	32	98	56	110	⊖ ⊕ +	⊖
FB4L-B	550590	12	4	4.2	56	120	70	92	⊖ ⊕ +	⊖
FB5L-B (12N5-3B)	550591	12	5	5.3	65	120	60	130	⊖ ⊕ +	⊖
FB7L-B2 (12N7-3B)	550595	12	8	8.4	85	135	75	133	⊖ ⊕ +	⊖
FB7-A (12N7-4A)	550592	12	8	8.4	105	135	75	133	⊖ ⊕ +	⊖
FB7C-A	550593	12	8	8.4	85	130	90	114	⊖ ⊕ +	⊖
FB9-B (12N9-4B-1)	550596	12	9	9.5	115	135	75	139	⊖ ⊕ +	⊖
FB9L-B (12N9-3B)	550599	12	9	9.5	115	135	75	139	⊖ ⊕ +	⊖
FB10L-A2	550556	12	11	11.6	130	135	90	145	⊖ ⊕ +	⊖
FB10L-B2	550557	12	11	11.6	130	135	90	145	⊖ ⊕ +	⊖
FB10L-BP (FB10L-B)	550558	12	11	11.6	165	135	90	145	⊖ ⊕ +	⊖
FB12A-A (12N12A-4A-1)	550561	12	12	12.6	155	134	80	160	⊖ ⊕ +	⊖
FB12AL-A/A2	550564	12	12	12.6	155	134	80	160	⊖ ⊕ +	⊖
FB12A-B	550562	12	12	12.6	155	134	80	160	⊖ ⊕ +	⊖
FB12C-A	550566	12	12	12.6	155	134	80	175	⊖ ⊕ +	⊖
FB14-A2 (12N14-4A)	550567	12	14	14.7	175	134	89	166	⊖ ⊕ +	⊖
FB14L-A2 (12N14-3A)	550569	12	14	14.7	175	134	89	166	⊖ ⊕ +	⊖
FB14L-B2	550570	12	14	14.7	175	134	89	166	⊖ ⊕ +	⊖
FB14A-A2	550571	12	14	14.7	175	134	89	176	⊖ ⊕ +	⊖
FB16B-A1	550897	12	16	16.8	210	160	90	161	⊖ ⊕ +	⊖
FB16AL-A2	550576	12	16	16.8	210	207	71	164	⊖ ⊕ +	⊖
FB16CL-B	550579	12	19	20.0	240	175	100	175	⊖ ⊕ +	⊖
FB30L-B	550552	12	30	31.6	300	165	130	176	⊖ ⊕ +	⊖
FB30CL-B	550553	12	30	31.6	300	165	130	192	⊖ ⊕ +	⊖
F50-N18L-A /12N18-3A	550547	12	20	21.1	260	205	90	162	⊖ ⊕ +	⊖
F50-N18L-A3	550899	12	20	21.1	260	205	90	162	⊖ ⊕ +	⊖
51814	550545	12	-	19	210	186	82	171	⊖ ⊕ +	⊖
51913	550542	12	-	19	210	186	82	171	⊖ ⊕ +	⊖
53030 (F60-N30L-A)	550544	12	-	30	300	186	130	171	⊖ ⊕ +	⊖
53034 (F60-N30-A)	550546	12	-	30	300	186	130	171	⊖ ⊕ +	⊖



UPGRADE CROSS REFERENCE CHART

DRY	MF	GEL	LITHIUM
6N4-2A ; 6N4-2A-4		6N4-2A/A-4 GEL	
6N6-3B ; 6N6-3B-1		6N6-3B/B-1 GEL	
B49-6		B49-6 GEL	
B38-6A		B38-6A GEL	
6N11A-1B ; 6N11A-3A		6N11A-1B/3A GEL	
12N5.5-3B		12N5.5-3B GEL	
12N5.5-4A		12N5.5-4A GEL	
FB3L-A ; FB3L-B		FB3L-A/B GEL	
FB4L-B		FB4L-B GEL	FLTX4L/5L/7L / FLTZ5S/6S/7S
FB5L-B ; 12N5-3B		FB5L-B GEL	
12N7-4A ; FB7-A		FB7-A GEL	
FB7C-A		FB7C-A GEL	
FB7L-B ; FB7L-B2 ; 12N7-3B		FB7L-B/B2 GEL	FLTX4L/5L/7L / FLTZ5S/6S/7S
FB9-B ; 12N9-4B1	FT9A-BS	FB9-B GEL	
FB10L-A2 ; FB10L-B2 ; 12N10-3A/B		FB10L-A2/B2 GEL	
FB12AL-A ; FB12AL-A2		FB12AL-A2 GEL	
FB12A-A ; FB12A-B ; 12N12A-4A-1		FB12A-A/B GEL	
FB14A-A1 ; FB14A-A2		FB14A-A2 GEL	
FB16AL-A2		FB16AL-A2 GEL	
FB16CL-B		FB16CL-B GEL	FLTX20HL
	FT4B-BS	FT4B-BS GEL	
	FTR4A-BS	FTR4A-BS GEL	
	FTX4L-BS/FTZ5S	FTX4L-BS/FTZ5S GEL	FLTX4L/5L/7L - FLTZ5S/6S/7S
	FTX5L-BS	FTX5L-BS/FTZ6S GEL	FLTX4L/5L/7L / FLTZ5S/6S/7S
	FTX7A-BS	FTX7A-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX7L-BS	FTX7L-BS GEL	FLTX4L/5L/7L / FLTZ5S/6S/7S
	FTX9-BS	FTX9-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FT12A-BS	FT12A-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX12-BS	FTX12-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX14-BS	FTX14-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX14L-BS	FTX14L-BS GEL ; FHD14HL-BS GEL	
FB14-A2 ; FB14-B2 ; 12N14-4A	FTX14AH-BS	FTX14AH-BS/FB14-A2 GEL	
FB14L-A2 ; FB14L-B2 ; 12N14-3A	FTX14AHL-BS	FTX14AHL-BS/FB14L-A2 GEL	
	FTX16-BS	FTX16 GEL	
	FTX20-BS	FTX20-BS GEL	FLTX20H
	FTX20A-BS	FTX20A-BS GEL	
FB16L-B ; FB18L-A	FTX20L-BS	FTX20HL-BS GEL ; FHD20HL-BS GEL	FLTX20HL
12N18-3A ; F50-N18L-A ; F50-N18L-A3	FTX24HL-BS	FTX24HL-BS/F50-N18L-A/A2/A3 GEL	
FB30L-B	FIX30L-BS	FIX30L-BS GEL ; FHD30HL-BS GEL	
		FTZ7V	FLTX4L/5L/7L / FLTZ5S/6S/7S
		FTZ7S GEL ; FTZ8V GEL	FLTX4L/5L/7L / FLTZ5S/6S/7S
		FT7B-4 GEL	FLT7B/9B
		FT9B-4 GEL	FLT7B/9B
		FTZ10S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FTZ12S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FT12B-4 GEL	FLT12B/14B
		FTZ14S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FT14B-4 GEL	FLT12B/14B
51814 ; 51913		NH12-20 GEL	
53030 ; F60-N30L-A		53030 GEL	FLTX30HL
53034 ; F60-N30-A		53034 GEL	

LITHIUM

Ready to use
High CCA performance
Ultra lightweight

GEL

Ready to use
100% maintenance free
Non-spillable

MF

100% maintenance free
Higher cycle life
Unlimited shelf life

DRY

DRY charged construction
6 & 12V batteries
Unlimited shelf life

CHARGERS

Whether it is to charge or maintain lead-acid or lithium batteries (LiFePO4), Fulbat chargers will be able to answer all your needs, from the smallest battery to the largest capacity. Designed with different charging stages, our automatic smart chargers will guarantee optimum charging efficiency and safety.

CHARGERS

FULLLOAD 1000 (P/N: 750514)

BATTERY COMPATIBILITY: LEAD-ACID & LITHIUM
VOLTAGE: 6V/12V
CHARGING RATE: 1A
STAGES: 3

- Charges and maintains 6V/12V lead-acid batteries (GEL, AGM, MF, DRY, Ca/Ca, WET) and 12V LiFePO4 batteries
- 1A charging current with battery capacity up to 20Ah (maintains all sizes)
- 4 charge modes
- Easy to set up & use: connect, select a charge mode and forget
- Easy to read LED display
- Full protected against short circuit, wrong connections, overcharge and overheat
- Delivered with: 1 clamps set and 1 eyelet terminals set



FULBANK 2000 (P/N: 750547)

BATTERY COMPATIBILITY: LEAD-ACID & LITHIUM
VOLTAGE: 6V/12V
CHARGING RATE: 3X2A
STAGES: 4

- Charges & maintains 3 batteries with different voltage and technologies at once
- 2A per bank with battery capacity up to 40Ah (120Ah in maintenance)
- For all batteries: GEL, AGM, MF, DRY, Ca/Ca & LiFePO4
- Easy to read LED display
- Full protected against short circuit, wrong connections, overcharge and overheat
- Splash & dust proof (IP65)
- Delivered with: 3 clamps and 3 fused connection set



FULLLOAD F4 (P/N: 750515)

BATTERY COMPATIBILITY: LEAD-ACID & LITHIUM
VOLTAGE: 6V/12V
CHARGING RATE: 2-4A
STAGES: 8


- Charges and maintains 6V/12V lead-acid batteries (GEL, AGM, MF, DRY, Ca/Ca, WET) and 12V LiFePO4 batteries
- 2A or 4A charging current with battery capacity up to 80Ah (maintains all sizes)
- 7 charge modes including 12V repair mode
- Easy to set up & use: connect, select a charge mode and forget
- Easy to read LED display
- Full protected against short circuit, wrong connections, overcharge and overheat
- Delivered with: 1 clamps set and 1 eyelet terminals set



ASSEMBLY PARTS (P/N: 750518)

BOX CONTENT:
2x BLACK RAILS
12x SCREWS
12x BOLTS FASTENING

- To mount up 2 Fulbank 2000 chargers on to battery display
- Up to 6 batteries charged at once
- Ideal to create a small charging station

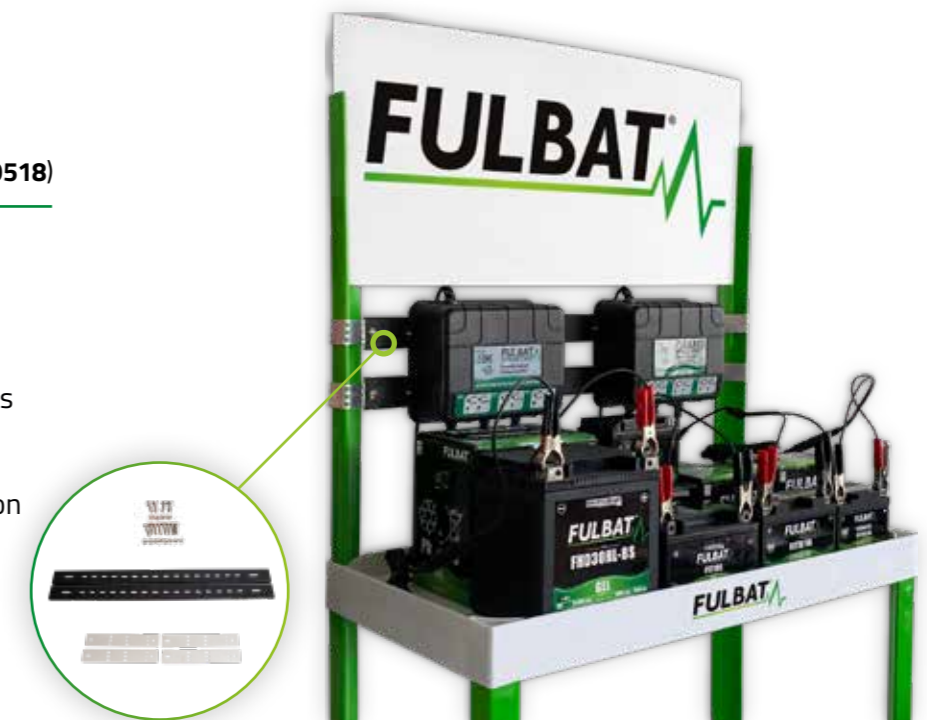

BOOSTER

These accessories are ideal for the maintenance of all our ranges of batteries. Whatever your type of application (motorcycle, scooter, quad, jet-ski, lawn mower, etc.), you will always find the Fulbat accessory to maximize your battery's performance.

TESTER & ACCESSORIES

FULBOOST (P/N: 750553)

FUNCTION: BOOSTER, POWERBANK & LIGHT
CAPACITY: 4AH
START CURRENT: 800A
PEAK CURRENT: 1600A

- Compact & powerful lithium booster rated at 1600A
- For vehicles equipped with a 12V Lead-acid battery
- Designed for gas engines up to 7.0L and diesel up to 6.0L
- Ultra-safe thanks to smart cables technology : spark-proof, short-circuit & reverse polarity protection
- Charger for all types of USB devices
- Ultra-bright 150 lumens LED flashlight with 3 modes: constant, SOS, flash



3 IN ONE



BOOSTER
For 12V vehicles

POWER BANK
For all electrical devices

TORCH
3 light modes



FULTEST 1 (P/N: 750502)

FUNCTION: BATTERY & ALTERNATOR TESTER

- For 12V lead-acid batteries only
- Test the condition of the battery and alternator
- Control the right starting ability of the vehicle
- The ideal tool to verify the state of charge of the battery



FULTEST 2 (P/N: 750521)

FUNCTION: BATTERY & ALTERNATOR TESTER

- For all 12V vehicle and motorcycles batteries (lithium & lead-acid)
- 3 battery tests: cold cranking amps, voltage, internal resistance
- Alternator and cranking system test
- Easy to read thanks to the large LCD screen



FULCONNECT INDICATOR (P/N: 750516)

FUNCTION: BATTERY TESTER
CHARGERS COMPATIBILITY: FULLOAD 1000 / FULLOAD F4 / FULBANK 2000


- For 12V lead-acid batteries only
- Ideal solution if the battery is difficult to access
- To check the state of charge of the battery with its 3 integrated LEDs: green, orange, red
- Wire length: 500mm
- M8 eyelet terminal



FULCONNECT (P/N: 750507)

CHARGERS COMPATIBILITY: FULLOAD 1000 / FULLOAD F4 / FULBANK 2000



- For 12V lead-acid & lithium batteries
- Ideal solution if the battery is difficult to access
- Wire length: 600mm
- M6 eyelet terminal

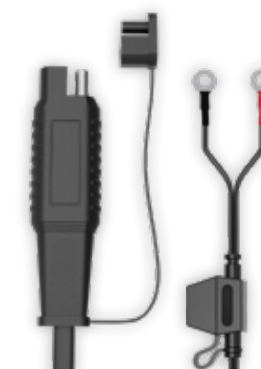



Visit our website for more information
www.fulbat.com

DISCOVER **FULBAT** RANGES

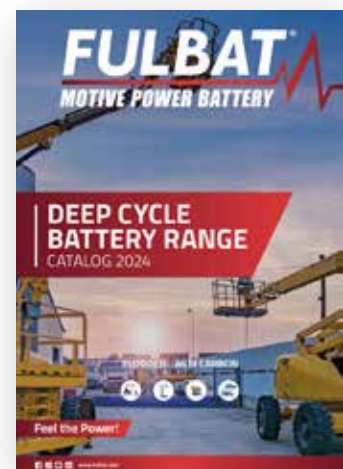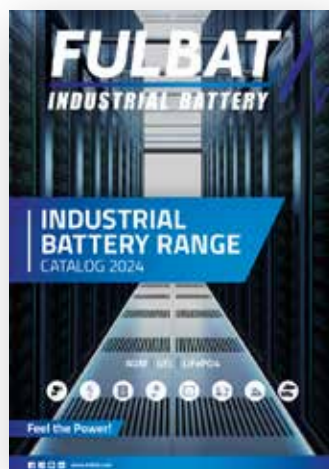

Release 2023.09